







# PALIMEX<sup>®</sup>-Anker

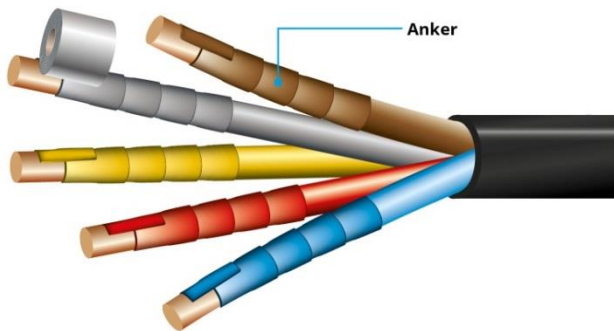

## Product Information



### Special Advantages:

-  Usable at temperatures from 0 °C (+32 °F) to +90 °C (+194 °F).
-  Self-extinguishing carrier film.
-  High dielectric strength.
-  Excellent adhesion on many surfaces.
-  Available in 11 colors.

## PVC insulation and multi-purpose universal tape with self-extinguishing carrier film for industrial and commercial use.

DEKOTEC GmbH stands for experience, quality and reliability in the field of corrosion prevention and sealing technology. The success is based on the development of the Petrolatum-Tape which was already developed in 1927 as the first product worldwide for passive corrosion prevention of pipelines. We establish and guarantee the highest quality standards with technically trend-setting products. Research, development and production take place exclusively in Germany. Our employees are continuously implementing safe and individual solutions in a personal cooperation with the customer.

## Product Description

**PALIMEX<sup>®</sup>-Anker** is a universal insulation and multi-purpose tape consisting of a PVC carrier film with a rubber adhesive coating.

PALIMEX<sup>®</sup>-Anker has a tape thickness of just 0.15 mm, making it highly flexible and adaptable.

PALIMEX<sup>®</sup>-Anker is the ideal choice for a great many industrial and commercial applications, including those that involve insulation, bundling, bonding, marking, sealing, etc.

PALIMEX<sup>®</sup>-Anker remains thermally stable at temperatures as high as +90 °C (+194 °F).

PALIMEX<sup>®</sup>-Anker is available in 11 colors and a wide variety of dimensions.

## Typical product properties

Property	Unit	Typical value
Thickness	mm	0.15 (approx.)
Color	-	Blue, brown, yellow, green, grey, Isogeno-grey, orange, red, black, white, yellow/green (earthing)
Traction resistance	N/cm	≥ 30
Elongation after fracture	%	≥ 170
Adhesion on steel	N/cm	≥ 1.8
Adhesion layer/layer	N/cm	≥ 1.8
Dielectric strength	kV/mm	≥ 40
Design temperature	°C (°F)	0 to +90 (+32 - +194)
Application temperature	°C (°F)	-5 to +70 (+23 - +158)

## Ordering information and packaging

---

Roll length 10 m

Width (mm)	Rolls per box	Tape area (m <sup>2</sup> ) per box	Total tape length (m) per box
15	120	18	1200
30	60	18	600
50	48	24	480
100	24	24	240

## Storage

---

When stored in its original, unopened packaging, **PALIMEX®-Anker** can be stored for at least 60 months after the manufacturing date.

Storage temperature: ≤ +30°C (+86°F)

Store in a dry location and do not rest anything against the front of the product.

---

### DEKOTEC GmbH

P.O. Box 150120 | 51344 Leverkusen | Germany

Phone: +49 214 2602-0

[www.dekotec.com](http://www.dekotec.com) | [info@dekotec.com](mailto:info@dekotec.com)

Our product information, our application recommendations and other product related documents are made for your convenience only. Since many installation factors are beyond our control, the user shall determine the suitability of the products for the intended use and assume all risks and liabilities in connection therewith.

All information contained in this document is to be used as a guide and does not constitute a warranty of specification. The information contained in the document is subject to change without notice. For this reason, no liability can be accepted for inaccurate advice or any failure to provide advice.

The user is responsible for checking the applications of the product and verifying its suitability for the intended use.

Our General Terms of Sale, which are available at [www.dekotec.com](http://www.dekotec.com), shall be decisive without any exception.

This is a translation from the original German product information.

In case of any discrepancy or any dispute arising on the interpretation of this product information, the German text of the respective German product information, which is available at [www.denso-group.com](http://www.denso-group.com), shall be decisive.

The legal relationship shall be governed by German law.

11.2018